


FN-E



Τεχνικά χαρακτηριστικά

Υλικό Φίλτρου	Νάιλον
Μεγ. Θερμοκρασία λειτουργίας	80°C
Μεγ. Σχετική υγρασία λειτουργίας	100%
Αντίσταση κατά πυρκαγιάς	F1 - DIN.53438
Δεν περιέχει σιλικόνη	

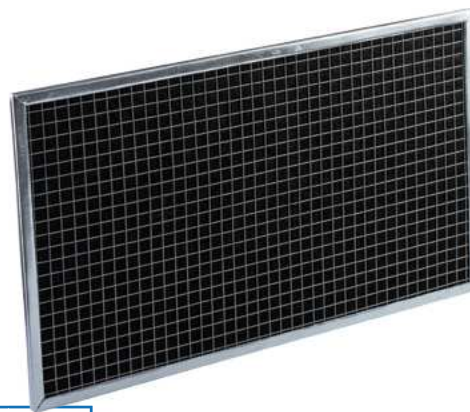

Εφαρμογές

- Κλιματιστικές μονάδες
- Φαν Κόιλς
- Σε στόμια επιστροφής αέρα



Οφέλη

- Πληνόμενο
- Μεγάλη διάρκεια ζωής



Κατασκευή

Πλαίσιο	Γαλβανιζέ
Πλέγμα	Γαλβανιζέ
Πάχος Προφίλ	5mm-10mm
• Κατά παραγγελία κατασκευάζονται σε όλα τα προφίλ	
• Πλέγματα συγκράτησης του φίλτρου/ηλεκτρονικού και από τις 2 πλευρές	
• Κατασκευάζονται σε όλες τις διαστάσεις	



Technical Characteristics

Filter material	Nylon
Max. Operating Temperature	80°C
Max. Operating R.H	100%
Fire behaviour	F1 - DIN.53438
Silicon free	



Applications

- Air handling units
- Fan Coils
- In return air grills



Benefits

- Washable
- Long durability




Made of

Frame	Galvanized
Wire mesh	Galvanized
Frame Thickness	5mm-10mm
• On demand special thickness	
• Wire mesh in both sides for filter holding	
• They are manufactured in all dimensions	

Τεχνικά δεδομένα / Technical data

ΤΥΠΟΣ	ΠΡΟΦΙΛ ΠΛΑΙΣΙΟΥ Frame Thickness	ΔΙΑΣΤΑΣΗ Dimensions	ΕΠΙΦΑΝΕΙΑ Surface	ΠΑΡΟΧΗ ΑΕΡΑ ΜΕ 1,5m/sec Air Flow at 1,5m/sec	ΑΡΧΙΚΗ ΠΤΩΣΗ ΠΙΕΣΗΣ Initial Pressure Drop	ΤΕΛΙΚΗ ΠΤΩΣΗ ΠΙΕΣΗΣ Final Pressure Drop	ΙΚΑΝΟΤΗΤΑ ΣΥΓΚΡΑΤΗΣΗΣ ΣΚΟΝΗΣ Dust holding capacity
Type	mm	mm	m ²	m ³ /h	Pa	Pa	g/m ²
5mm ΠΡΟΦΙΛ - THICKNESS							
FW-E-G2B-5	5	1000x1000	1	5400	12	250	69
FW-E-G2B-5	5	1000x200	0,2	1080	12	250	69
FW-E-G2B-5	5	800x200	0,16	850	12	250	69
FW-E-G2B-5	5	592x592	0,35	1900	12	250	69
FW-E-G2B-5	5	490x592	0,29	1550	12	250	69
FW-E-G2B-5	5	457x592	0,27	1450	12	250	69
FW-E-G2B-5	5	287x592	0,17	950	12	250	69
FW-E-G2B-5	5	287x490	0,14	750	12	250	69
FW-E-G2B-5	5	287x287	0,08	450	12	250	69
10mm ΠΡΟΦΙΛ - THICKNESS							
FW-E-G2B-10	10	1000x1000	1	5400	12	250	69
FW-E-G2B-10	10	1000x200	0,2	1080	12	250	69
FW-E-G2B-10	10	800x200	0,16	850	12	250	69
FW-E-G2B-10	10	592x592	0,35	1900	12	250	69
FW-E-G2B-10	10	490x592	0,29	1550	12	250	69
FW-E-G2B-10	10	457x592	0,27	1450	12	250	69
FW-E-G2B-10	10	287x592	0,17	950	12	250	69
FW-E-G2B-10	10	287x490	0,14	750	12	250	69
FW-E-G2B-10	10	287x287	0,08	450	12	250	69

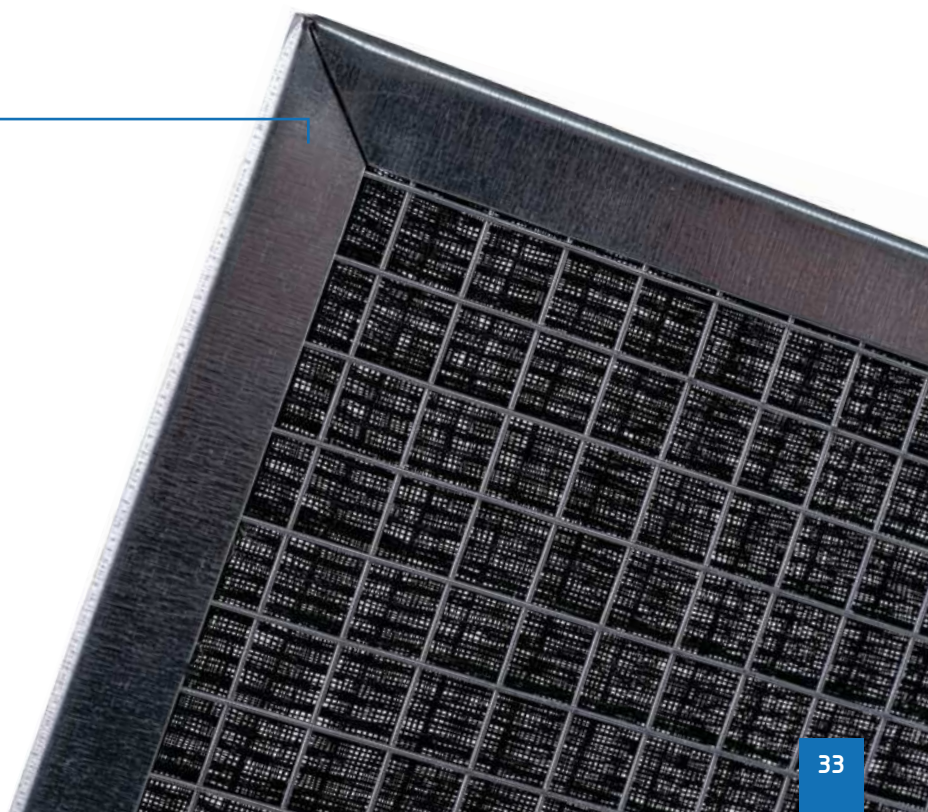

ΦΙΛΤΡΑ ΣΕ ΡΟΛΟ
Γ ΠΛΑΚΕΣ

ΠΡΟΦΙΛΤΡΑ
ΕΠΙΠΕΔΑ

ΠΡΟΦΙΛΤΡΑ
Z-LINE

ΦΙΛΤΡΑ ΛΙΠΟΥΣ
ΜΕΤΑΛΛΙΚΑ

ΣΑΚΟΦΙΛΤΡΑ

ΣΤΑΘΕΡΑ
ΣΑΚΟΦΙΛΤΡΑ

ΑΠΟΛΥΤΑ -
ΗΕΡΑ

ΕΝΕΡΓΟΥ
ΑΝΘΡΑΚΑ

ΣΥΣΤΗΜΑΤΑ
ΑΠΟΣΜΙΝΗΣΗΣ